
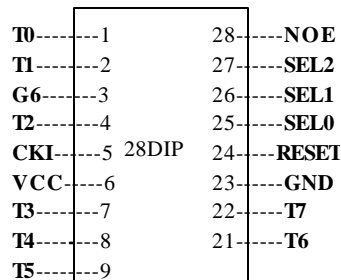
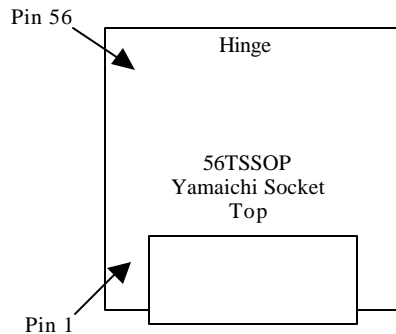


National Semiconductor  
AnalogMicroControllers Group

COP8-PGMA-56TF1  
Programming Adapter for COP8 Flash devices in 56TSSOP  
(COP8Sxx9, COP8Cxx9)  
Rev 1, 7/1/01

Only 17 pins are connected. Check the socket drawing for pin 1 location. Use Yamaichi lidded test socket: IC51-0562-1513.

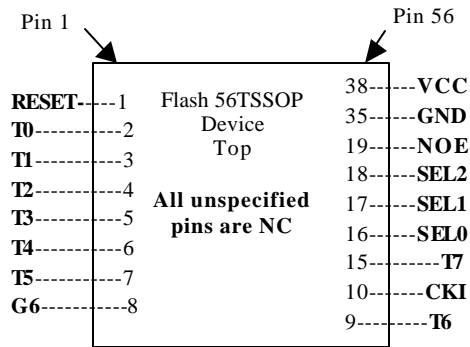

Label adapter:  
COP8-PGMA-56TF1 Flash

COP8 Flash  
28pin BASE